




RIV 2330

Tubular foot valve


Tech drawings and tables

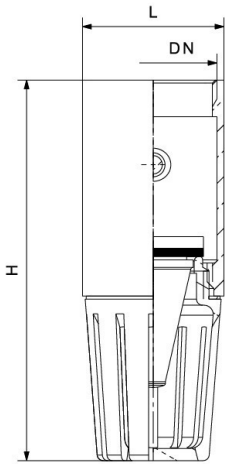

DN	Code	H	L	PN	KG	P/box
3/4"	032330000005	95	30	10	0,192	1
1"	032330000007	111	39	10	0,274	1
1"1/4	032330000008	127	46	8	0,470	1
1"1/2	032330000009	140	54	8	0,595	1
2"	032330000011	165	65	8	0,941	1
2"1/2	032330000013	173	82	6	1,600	1
3"	032330000014	196	99	6	2,313	1
4"	032330000016	218	116	6	3,661	1

Technical data

RIV 2330



Materials			
1	Body	Brass	CB754S
2	Filter	Brass	CB754S
3	Gasket	Flibre	
4	Gasket	NR	
5	Obturator	Brass	3/4"-1"1/4 CW617N 1"1/2-4" CB754S

Connections	ISO 228/1
Limit	-10°C (without liquid) +90°C
Notes	The max. working pressure (PN) means at a room temperature of about 23°C.